

HESHENG


HESHENG Cable Glands



CUSTOMIZED CONNECTOR

HESHENG

Cable Glands

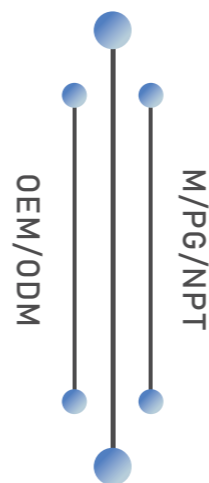

禾盛五金實業有限公司

HeSheng Hardware Co., Ltd.

臺灣臺中市南屯區環中路五段66-6號

66-6, Section 5, Huanzhong Road,
Nantun District, Taichung (TAIWAN)

T. +886 4 24790000 / F.+886 4 2479 3300

sales@heshengcables.com.tw

穆訊特種電線電纜(上海)有限公司

MUXUN Speical Wires and Cables (Shanghai) Co., Ltd.

上海青浦區蘆蔘北路218號2F廠房1層

Floor 1 2F Plant NO.218 LuCai NorthRoad
QingPu District Shanghai (China)

T. +86 021 588 76870 / F.+86 021 289 70221

info@motioncables.com.cn



www.heshengcables.com.tw



禾盛 HESHENG

CUSTOMIZED CABLE SOLUTION

HESHENG: Your One-Stop Shop for Custom Connectors and Cables. We are happy to OEM or ODM.

HESHENG is a leading provider of customized cables and connectors. With a commitment to professionalism, integrity, and excellence, we ensure your satisfaction at every step, from design and development to manufacturing and quality inspection. Our team of experts is dedicated to providing our customers with the highest quality products and services.

At HESHENG, we understand that your needs are unique. That's why we offer a wide range of customizable solutions to meet the specific requirements of your project. We also maintain a large inventory of products on hand, ensuring a quick and efficient project start.

Whether you need a simple connector or a complex cable assembly, HESHENG can assist. We are dedicated to providing our customers with the best possible experience, from start to finish. Contact us today to learn more about our services or to receive a quote for your next project.



High Speed 5-Axis Machining Center



Sliding Headstock Type
Automatic CNC Lathe



Turrets type Turning and Milling Center






optical comparator

Cable glands nickel-plated brass

Short entry thread metric

Material: Nickel-plated brass
 Seal: TPE
 O-ring: NBR
 Protection class: IP 68 (up to 10 bar) / IP 69
 Operation temperature: -40 °C / +120 °C






M	\varnothing _{min mm}	\varnothing _{max mm}	 mm	H mm	L mm	Art.-No.	
M8x1.25	2.5	3.5	11	14	5	1001.08.035	50
M8x1.25	3.5	5.0	11	14	5	1001.08.050	50
M10x1.5	3.0	4.0	13	15	5	1001.10.040	50
M10x1.5	4.0	6.0	13	15	5	1001.10.060	50
M12x1.5	3.5	5.0	15	17	5	1001.12.050	50
M12x1.5	5.0	6.5	15	17	5	1001.12.065	50
M12x1.5	6.5	8.0	15	17	5	1001.12.080	50
M16x1.5	3.5	4.5	18	20	5	1001.17.045	50
M16x1.5	4.5	6.0	18	20	5	1001.17.060	50
M16x1.5	6.0	8.0	18	20	5	1001.17.080	50
M16x1.5	8.0	10.5	18	22	5	1001.17.105	50
M20x1.5	6.0	8.0	24	21	6	1001.20.080	50
M20x1.5	8.0	11.0	24	21	6	1001.20.110	50
M20x1.5	11.0	15.0	24	23	6	1001.20.150	50
M25x1.5	9.5	12.5	30	25	7	1001.25.125	25
M25x1.5	12.5	16.0	30	27	7	1001.25.160	25
M25x1.5	16.0	20.5	30	28	7	1001.25.205	25
M32x1.5	14.0	17.0	36	28	8	1001.32.170	25
M32x1.5	17.0	21.0	36	28	8	1001.32.210	25
M32x1.5	21.0	25.5	36	28	8	1001.32.255	25
M40x1.5	20.0	24.0	46	31	8	1001.40.240	10
M40x1.5	24.0	28.5	46	31	8	1001.40.285	10
M40x1.5	28.5	33.0	46	31	8	1001.40.330	10
M50x1.5	29.0	33.0	55	34	9	1001.50.330	10
M50x1.5	33.0	37.0	55	34	9	1001.50.370	10
M50x1.5	37.0	42.0	55	34	9	1001.50.420	10
M63x1.5	35.0	40.0	70	37	10	1001.63.400	5
M63x1.5	40.0	46.0	70	37	10	1001.63.460	5
M63x1.5	46.0	52.0	70	37	10	1001.63.520	5
M75x1.5	45.0	50.0	80	38	11	1001.75.500	1
M75x1.5	50.0	56.0	80	38	11	1001.75.560	1
M75x1.5	56.0	63.0	80	38	11	1001.75.630	1

Cable glands Progress® nickel-plated brass

Long entry thread metric

Material: Nickel-plated brass
 Seal: TPE
 O-ring: NBR
 Protection class: IP 68 (up to 10 bar) / IP 69
 Operation temperature: -40 °C / +120 °C




M	\varnothing _{min mm}	\varnothing _{max mm}	 mm	H mm	L mm	Art.-No.	
M8x1.25	2.5	3.5	11	14	10	1101.08.035	50
M8x1.25	3.5	5.0	11	14	10	1101.08.050	50
M10x1.5	3.0	4.0	13	15	10	1101.10.040	50
M10x1.5	4.0	6.0	13	15	10	1101.10.060	50
M12x1.5	3.5	5.0	15	17	10	1101.12.050	50
M12x1.5	5.0	6.5	15	17	10	1101.12.065	50
M12x1.5	6.5	8.0	15	17	10	1101.12.080	50
M16x1.5	3.5	4.5	18	20	10	1101.17.045	50
M16x1.5	4.5	6.0	18	20	10	1101.17.060	50
M16x1.5	6.0	8.0	18	20	10	1101.17.080	50
M16x1.5	8.0	10.5	18	22	10	1101.17.105	50
M20x1.5	6.0	8.0	24	21	10	1101.20.080	50
M20x1.5	8.0	11.0	24	21	10	1101.20.110	50
M20x1.5	11.0	15.0	24	23	10	1101.20.150	50
M25x1.5	9.5	12.5	30	25	11	1101.25.125	25
M25x1.5	12.5	16.0	30	27	11	1101.25.160	25
M25x1.5	16.0	20.5	30	28	11	1101.25.205	25
M32x1.5	14.0	17.0	36	28	13	1101.32.170	25
M32x1.5	17.0	21.0	36	28	13	1101.32.210	25
M32x1.5	21.0	25.5	36	28	13	1101.32.255	25
M40x1.5	20.0	24.0	46	31	13	1101.40.240	10
M40x1.5	24.0	28.5	46	31	13	1101.40.285	10
M40x1.5	28.5	33.0	46	31	13	1101.40.330	10
M50x1.5	29.0	33.0	55	34	14	1101.50.330	10
M50x1.5	33.0	37.0	55	34	14	1101.50.370	10
M50x1.5	37.0	42.0	55	34	14	1101.50.420	10
M63x1.5	35.0	40.0	70	37	14	1101.63.400	5
M63x1.5	40.0	46.0	70	37	14	1101.63.460	5
M63x1.5	46.0	52.0	70	37	14	1101.63.520	5
M75x1.5	45.0	50.0	80	38	15	1101.75.500	1
M75x1.5	50.0	56.0	80	38	15	1101.75.560	1
M75x1.5	56.0	63.0	80	38	15	1101.75.630	1

Cable glands nickel-plated brass

Short entry thread Pg

Material: Nickel-plated brass
 Seal: TPE
 O-ring: NBR
 Protection class: IP 68 (up to 10 bar) / IP 69
 Operation temperature: -40 °C / +120 °C




P	>∅< min mm	>∅< max mm	∅ mm	H mm	L mm	Art.-No.	∅
Pg 7	3.5	5.0	15	17	6.0	1002.07.050	50
Pg 7	5.0	6.5	15	17	6.0	1002.07.065	50
Pg 7	6.5	8.0	15	17	6.0	1002.07.080	50
Pg 9	3.5	4.5	18	20	6.0	1002.09.045	50
Pg 9	4.5	6.0	18	20	6.0	1002.09.060	50
Pg 9	6.0	8.0	18	20	6.0	1002.09.080	50
Pg 9	8.0	10.5	18	22	6.0	1002.09.105	50
Pg 11	4.0	5.5	21	21	6.0	1002.11.055	50
Pg 11	5.5	8.5	21	21	6.0	1002.11.085	50
Pg 11	8.5	12.0	21	21	6.0	1002.11.120	50
Pg 13	6.0	8.0	24	21	6.0	1002.13.080	50
Pg 13	8.0	11.0	24	21	6.0	1002.13.110	50
Pg 13	11.0	15.0	24	23	6.0	1002.13.150	50
Pg 16	6.0	8.0	24	23	6.0	1002.16.080	50
Pg 16	8.0	11.0	24	23	6.0	1002.16.110	50
Pg 16	11.0	15.0	24	23	6.0	1002.16.150	50
Pg 21	9.5	12.5	30	28	7.5	1002.21.125	25
Pg 21	12.5	16.0	30	28	7.5	1002.21.160	25
Pg 21	16.0	20.5	30	28	7.5	1002.21.205	25
Pg 29	16.0	19.0	38	28	8.0	1002.29.190	25
Pg 29	19.0	23.0	38	28	8.0	1002.29.230	25
Pg 29	23.0	27.5	38	28	8.0	1002.29.275	25
Pg 36	21.5	26.0	50	32	8.0	1002.36.260	10
Pg 36	26.0	30.5	50	32	8.0	1002.36.305	10
Pg 36	30.5	35.0	50	32	8.0	1002.36.350	10
Pg 42	29.0	33.0	55	34	10.0	1002.42.330	10
Pg 42	33.0	37.0	55	34	10.0	1002.42.370	10
Pg 42	37.0	42.0	55	34	10.0	1002.42.420	10
Pg 48	32.0	37.0	65	37	11.0	1002.48.370	5
Pg 48	37.0	43.0	65	37	11.0	1002.48.430	5
Pg 48	43.0	49.0	65	37	11.0	1002.48.490	5

Cable glands nickel-plated brass

Long entry thread Pg

Material: Nickel-plated brass
 Seal: TPE
 O-ring: NBR
 Protection class: IP 68 (up to 10 bar) / IP 69
 Operation temperature: -40 °C / +120 °C




P	>∅< min mm	>∅< max mm	∅ mm	H mm	L mm	Art.-No.	∅
Pg 7	3.5	5.0	15	17	10	1102.07.050	50
Pg 7	5.0	6.5	15	17	10	1102.07.065	50
Pg 7	6.5	8.0	15	17	10	1102.07.080	50
Pg 9	3.5	4.5	18	20	10	1102.09.045	50
Pg 9	4.5	6.0	18	20	10	1102.09.060	50
Pg 9	6.0	8.0	18	20	10	1102.09.080	50
Pg 9	8.0	10.5	18	22	10	1102.09.105	50
Pg 11	4.0	5.5	21	21	10	1102.11.055	50
Pg 11	5.5	8.5	21	21	10	1102.11.085	50
Pg 11	8.5	12.0	21	21	10	1102.11.120	50
Pg 13	6.0	8.0	24	21	10	1102.13.080	50
Pg 13	8.0	11.0	24	21	10	1102.13.110	50
Pg 13	11.0	15.0	24	23	10	1102.13.150	50
Pg 16	6.0	8.0	24	23	10	1102.16.080	50
Pg 16	8.0	11.0	24	23	10	1102.16.110	50
Pg 16	11.0	15.0	24	23	10	1102.16.150	50
Pg 21	9.5	12.5	30	28	12	1102.21.125	25
Pg 21	12.5	16.0	30	28	12	1102.21.160	25
Pg 21	16.0	20.5	30	28	12	1102.21.205	25
Pg 29	16.0	19.0	38	28	12	1102.29.190	25
Pg 29	19.0	23.0	38	28	12	1102.29.230	25
Pg 29	23.0	27.5	38	28	12	1102.29.275	25
Pg 36	21.5	26.0	50	32	15	1102.36.260	10
Pg 36	26.0	30.5	50	32	15	1102.36.305	10
Pg 36	30.5	35.0	50	32	15	1102.36.350	10
Pg 42	29.0	33.0	55	34	15	1102.42.330	10
Pg 42	33.0	37.0	55	34	15	1102.42.370	10
Pg 42	37.0	42.0	55	34	15	1102.42.420	10
Pg 48	32.0	37.0	65	37	15	1102.48.370	10
Pg 48	37.0	43.0	65	37	15	1102.48.430	10
Pg 48	43.0	49.0	65	37	15	1102.48.490	10

Cable glands nickel-plated brass

Entry thread NPT

Material: Nickel-plated brass
 Seal: TPE
 Protection class: IP 68 (up to 10 bar) / IP 69
 Operation temperature: -40 °C / +120 °C




NPT	>Ø< min mm	>Ø< max mm	mm mm	H mm	L mm	Art.-No.	📦
NPT 1/8"	3.0	4.0	13	15	8	1003.18.040	50
NPT 1/8"	4.0	6.0	13	15	8	1003.18.060	50
NPT 1/4"	3.5	5.0	15	17	12	1003.14.050	50
NPT 1/4"	5.0	6.5	15	17	12	1003.14.065	50
NPT 1/4"	6.5	8.0	15	17	12	1003.14.080	50
NPT 3/8"	3.5	4.5	18	20	12	1003.38.045	50
NPT 3/8"	4.5	6.0	18	20	12	1003.38.060	50
NPT 3/8"	6.0	8.0	18	20	12	1003.38.080	50
NPT 3/8"	8.0	10.5	18	22	12	1003.38.105	50
NPT 1/2"	6.0	8.0	24	21	15	1003.12.080	50
NPT 1/2"	8.0	11.0	24	21	15	1003.12.110	50
NPT 1/2"	11.0	15.0	24	23	15	1003.12.150	50
NPT 3/4"	9.5	12.5	30	28	15	1003.34.125	25
NPT 3/4"	12.5	16.0	30	28	15	1003.34.160	25
NPT 3/4"	16.0	20.5	30	28	15	1003.34.205	25
NPT 1"	14.0	17.0	36	28	20	1003.10.170	25
NPT 1"	17.0	21.0	36	28	20	1003.10.210	25
NPT 1"	21.0	25.5	36	28	20	1003.10.255	25

Cable glands stainless steel A2

Long entry thread metric

Material: stainless steel A2
 Seal: TPE
 O-ring: NBR
 Protection class: IP 68 (up to 10 bar) / IP 69
 Operation temperature: -40 °C / +120 °C




M	>Ø< min mm	>Ø< max mm	mm mm	H mm	L mm	i info	Art.-No.	📦
M8x1.25	2.5	3.5	11	14	10	1	2101.08.035	50
M8x1.25	3.5	5.0	11	14	10	1	2101.08.050	50
M10x1.5	3.0	4.0	13	15	10	1	2101.10.040	50
M10x1.5	4.0	6.0	13	15	10	1	2101.10.060	50
M12x1.5	3.5	5.0	17	17	10	-	2101.12.050	50
M12x1.5	5.0	6.5	17	17	10	-	2101.12.065	50
M12x1.5	6.5	8.0	17	17	10	-	2101.12.080	50
M16x1.5	8.0	10.5	19	20	10	-	2101.17.105	50
M20x1.5	11.0	15.0	24	21	10	-	2101.20.150	50
M25x1.5	16.0	20.5	30	25	11	-	2101.25.205	25
M32x1.5	21.0	25.5	36	28	13	-	2101.32.255	25
M40x1.5	28.5	33.0	46	31	13	-	2101.40.330	10
M50x1.5	37.0	42.0	55	34	14	-	2101.50.420	10
M63x1.5	46.0	52.0	70	37	14	-	2101.63.520	5

Cable glands stainless steel A2

Long entry thread metric

Material: stainless steel A2
 Seal: TPE
 O-ring: NBR
 Protection class: IP 68 (up to 10 bar) / IP 69
 Operation temperature: -40 °C / +120 °C

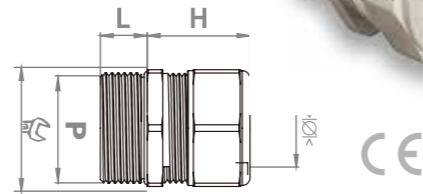

P	\varnothing min mm	\varnothing max mm	\varnothing mm	H mm	L mm	Art.-No.	
Pg 7	3.5	5.0	17	17	10	2102.07.050	50
Pg 7	5.0	6.5	17	17	10	2102.07.065	50
Pg 7	6.5	8.0	17	17	10	2102.07.080	50
Pg 9	8.0	10.5	19	20	10	2102.09.105	50
Pg 11	8.5	12.0	22	21	10	2102.11.120	50
Pg 13	11.0	15.0	24	21	10	2102.13.150	50
Pg 16	11.0	15.0	24	21	10	2102.16.150	50
Pg 21	16.0	20.5	30	25	12	2102.21.205	25
Pg 29	23.0	27.5	41	28	12	2102.29.275	25
Pg 36	30.5	35.0	50	32	15	2102.36.350	10
Pg 42	37.0	42.0	55	34	15	2102.42.420	10
Pg 48	43.0	49.0	65	37	15	2102.48.490	10